


16W SplashProof Fixture



Product #	Consumption ± 10%
VX-S34-L	12 V = 1,4 A
VX-S35-L	24 V = 0,7 A

Moulded polycarbonate enclosure

Weight 0.715 kg

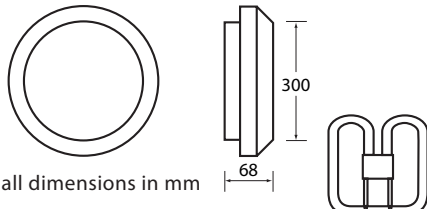

all dimensions in mm

PLC 16W - 4P / 1050 lm

14W Slim Fixture




Product #	Consumption ± 10%
VX-S05-L	12 V = 1,35 A
VX-S06-L	24 V = 0,7 A
VX-S60-L	48 V = 0,35 A

Aluminium base, plastic coated, white


Acrylic lens

Integrated switch

Weight 0.470 kg

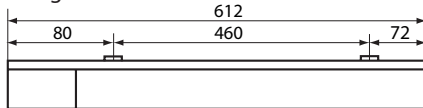

all dimensions in mm



TL 14W / 1200 lm

7W Slim Fixture




Product #	Consumption ± 10%
VX-S20-L	12 V = 0,6 A
VX-S21-L	24 V = 0,3 A

Aluminium base, plastic coated, white


Acrylic lens

Integrated switch

Weight 0.240 kg

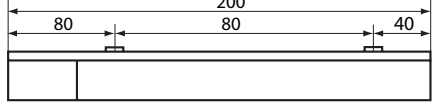

all dimensions in mm



PL 7W - 4P / 400 lm

7W - SplashProof Fixture




Product #	Consumption ± 10%
VX-S26-L	12 V = 0,6 A
VX-S27-L	24 V = 0,3 A

With glass, base plastic

Splashproof

Weight 0.700 kg

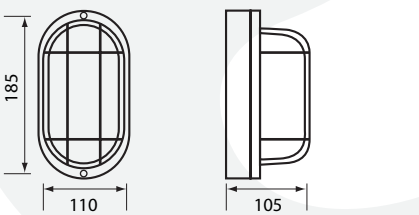

all dimensions in mm

PL 7W - 4P / 400 lm

11W Slim Fixture




Product #	Consumption ± 10%
VX-S22-L	12 V = 1,1 A
VX-S23-L	24 V = 0,55 A
VX-S65-L	48 V = 0,27 A

Aluminium base, plastic coated, white


Acrylic lens

Integrated switch

Weight 0.300 kg

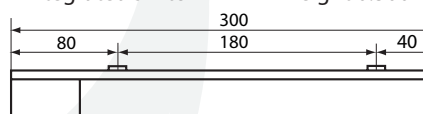

all dimensions in mm



PL 11W - 4P / 900 lm

11W SplashProof Fixture




Product #	Consumption ± 10%
VX-S24-L	12 V = 1,1 A
VX-S25-L	24 V = 0,55 A
VX-S66-L	48 V = 0,27 A


Moulded polycarbonate enclosure

Splashproof

Weight 0.600 kg

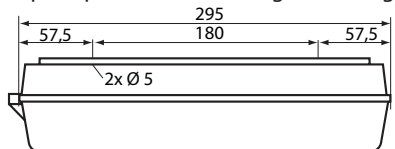

all dimensions in mm




PL 11W - 4P / 900 lm

13W Screw-in



Product #	Consumption ± 10%
VX-S30-L	12 V = 1,2 A
VX-S31-L	24 V = 0,6 A

Screw-in model Weight 0.220 kg

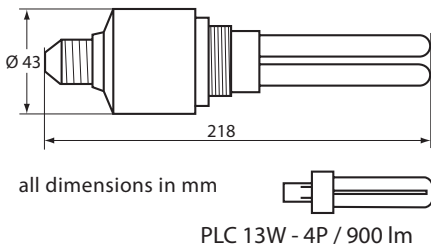


16W Screw-in



Product #	Consumption ± 10%
VX-S36-L	12 V = 1,4 A
VX-S37-L	24 V = 0,7 A

Screw-in model Weight 0.220 kg

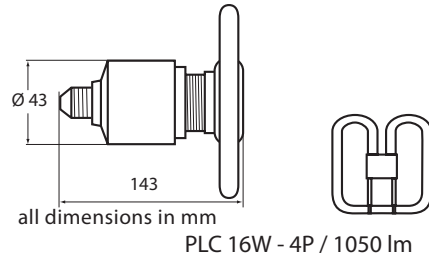


18W Screw-in



Product #	Consumption ± 10%
VX-S44-L	12 V = 1,6 A
VX-S45-L	24 V = 0,8 A

Screw-in model Weight 0.235 kg

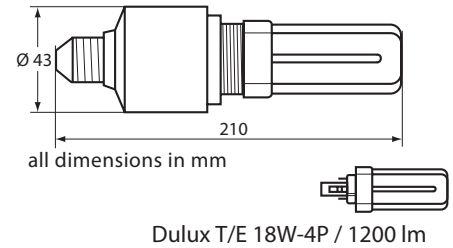


13W Suspended



Product #	Consumption ± 10%
VX-S32-L	12 V = 1,2 A
VX-S33-L	24 V = 0,6 A

Suspended model - Cable length 0,8m
Weight 0.290 kg

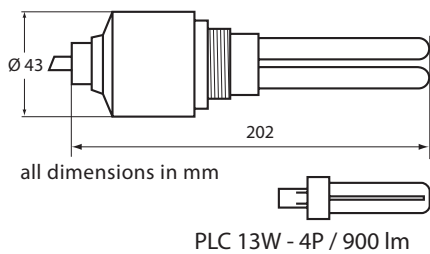


16W Suspended



Product #	Consumption ± 10%
VX-S38-L	12 V = 1,4 A
VX-S39-L	24 V = 0,7 A

Suspended model - Cable length 0,8m
Weight 0.290 kg

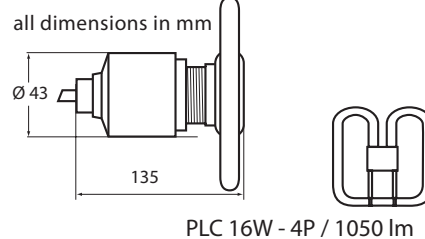


18W FloodLight



Product #	Consumption ± 10%
VX-S46-L	12 V = 1,5 A
VX-S47-L	24 V = 0,75 A
VX-S68-L	48 V = 0,38 A

Aluminium box
Splashproof Weight 1.000 kg

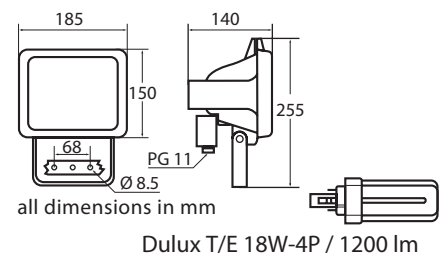

32W - 42W FloodLight




Product #	Consumption ± 10%
VX-S48-L	12V = 2,6 A 32W
VX-S49-L	24V = 1,3 A 32W
VX-S63-L	48V = 0,65 A 32W
VX-S51-L	24V = 1,8 A 42W
VX-S62-L	48V = 0,9 A 42W

Aluminium box

Splashproof

Weight 2.100 kg

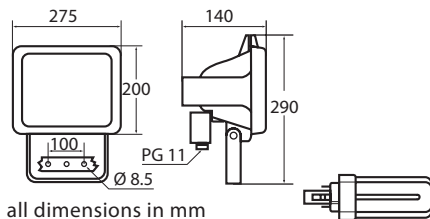

all dimensions in mm


Dulux T/E 32W / 2400 lm
Dulux T/E 42W / 3200 lm

Electronic Ballast *



Power supply voltage	12V	VX-S122-L
For tube	24V	VX-S242-L
	12V	VX-S123-L
	24V	VX-S243-L

Weight 0.105 kg

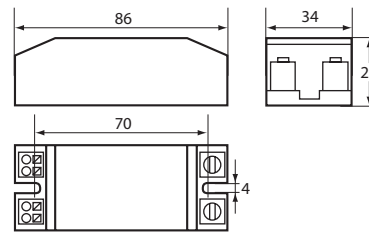

all dimensions in mm

PL5-7-9-11W/4P TL8-13W



PLC 10-13W/4P PLC 10-16W/4P(2D)



* Other ballasts available upon request



Brilliant 92% efficiency and crest factor better than 1.5.



Instant start even at temperatures down to -18°C (10°F).



Up to 75% less energy consumption over incandescent lamps.



Solid-state sealed converter protected against humidity.



Sinusoidal waveform for 8000-hour lamp life.



Flicker-free and constant luminous flux even with voltage drop.



No electromagnetic interference (EMI-RFI) to affect radio and navigation equipment.



Two-year warranty on the electronic module.